Rec'd PST/PTO 10 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 15 January 2004 (15.01.2004)

PCT

(10) International Publication Number WO 2004/004848 A1

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,

LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,

SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,

KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(84) Designated States (regional): ARIPO patent (GH, GM,

(81) Designated States (national): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(51) International Patent Classification7: A63F 9/16 A63D 3/00,

(21) International Application Number:

PCT/HU2002/000086

(22) International Filing Date:

11 September 2002 (11.09.2002)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: P 0202288

9 July 2002 (09.07.2002) HU

(71) Applicant and

(72) Inventor: SZILÁGYI, József [HU/HU]; Nádor u. 12, H-4027 Debrecen (HU). European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NI, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

Published:

with international search report


GW, ML, MR, NE, SN, TD, TG).

VN, YU, ZA, ZM, ZW.

[Continued on next page]

(74) Agent: EMRI-PATENT LTD.; Kartács u. 36., H-4032 Debrecen (HU).

(54) Title: TABLE BOWLING

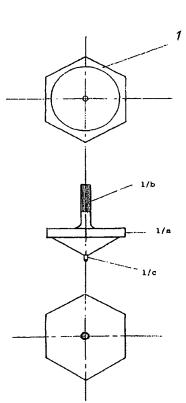

(57) Abstract: A table parlour game particularly a turbo-bowling comprising a turbo player unit (1), bowling pins (2) and a lane plate tilting to any direction (3). The turbo player unit (1) is a whirling top, namely a conical solid of rotation, the plate (1/a) of which is shaped to have a regular hexagonal pattern and furthermore equipped with a rotating tail (1/b) and tip (1/c) and the lane plate (3) is equipped by setting device (4) comprising centrally attached globe head (4/a) and globe shell